

ELECTRA 1007 Be

Product specification sheet

Pure Beryllium IAL tweeter.
Very wide response from 2kHz to 40kHz.
Low resonant frequency: 680Hz
High efficiency: 95dB/1W/1m

6 1/2" (165mm) "W" cone mid-bass.
Patented composite sandwich.
Outstanding stiffness and lightness.

Body in metallic Slate Grey piano lacquer.
Panels in wood veneering, varnish 11 coats.




OPC (Optimum Phase Crossover)
Perfect staging.
Focal binding posts offering high torque and excellent contact.

Advanced γ Structure
Massive structure of 2" (50mm) thick MDF.
No diffraction effect nor vibration.

Rear laminar port
No noise, no distortion.
Removable foam bung for bass level setting.



- 100% Focal loudspeakers and drive-units made in France
- Standard finishes, on demand or special personalized finishes
- High size/performance ratio for optimum integration
- Exclusive Focal technologies

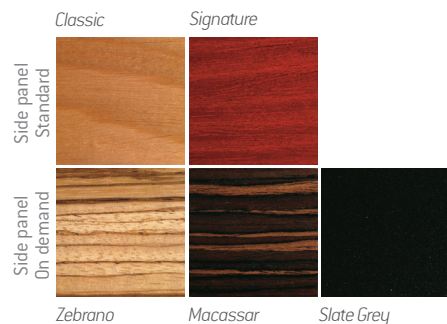

> 24" (60cm) High Gloss Electra
S1007.1 Be optional stand,
Slate Grey lacquer



> 24" (60cm) Standard Electra
S1007.1 Be optional stand,
Aluminum

Type	2-way vented bookshelf loudspeaker
Drivers	6 1/2" (165mm) "W" cone midbass 1" (25mm) pure Beryllium IAL inverted dome tweeter
Frequency response (+/-3dB)	46Hz - 40kHz
Low frequency point (-6dB)	41Hz
Sensitivity (2.83V/1m)	89dB
Nominal impedance	8 Ω
Minimum impedance	3.9 Ω
Crossover frequency	2000Hz
Recommended amplifier power	25 - 150W
Dimensions (HxWxD)	15 3/16 x 10 3/8 x 13 3/4" (385x264x350mm)
Net weight	33lbs (15kg)

The Electra 1007 Be symbolises a two way, compact statement to the very high end in the Focal language. An impressive bass depth and transparency for a loudspeaker of these dimensions. It comes with a foam bung to be placed when necessary into the port slot to control the level of bass.

